



Opto-Link
Corporation Ltd

PM Wavelength Division Multiplexer

Polarization Maintaining Wavelength Division Multiplexer (PMWDM) using Thin Film Filters technology (TFF) combine light with different wavelengths into a fiber or separate an optical signal into two fibers with special feature - maintaining polarization. This device provides low insertion loss and high return loss with high polarization extinction ratio.



Types

- Fused WDM
- Thin Film Filter WDM
- MultiMode WDM
- Polarization Maintaining WDM

Applications

- High Speed DWDM Systems
- Erbium-Doped Fiber Amplifiers
- CATV

Features

- Low Insertion Loss
- High Return Loss
- High Polarization Extinction Ratio
- Environmentally Stable




Opto-Link
Corporation Ltd

SPECIFICATIONS

Polarization Maintaining WDM (1550/980nm)

Parameter	Values	Units
Passband	Wavelength Range	1530 to 1580
	Max. Insertion Loss	0.7
	Min. Isolation @ Reflection Band Wavelength	30
Reflection Band	Wavelength Range	980 +/-20
	Max. Insertion Loss	0.6
	Min. Isolation @ Passband Wavelength	12
Min. Extinction Ratio		20
Min. Return Loss		50
Max. Tensile Load		5
Max. Handling Power (CW)		500
Fiber Length		1
Operating Temperature		-5 to +70
Storage Temperature		-40 to +85

*Above specifications are for device without connectors.

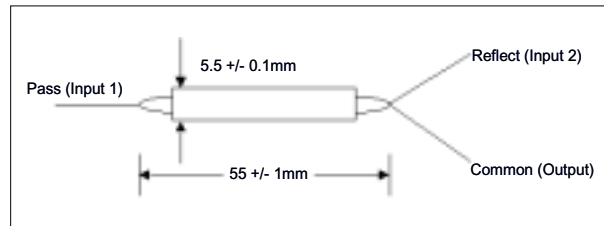

ORDERING CODES

OLWDM - P - [] - [] - []

Wavelength	Code
1550Pass/980Reflection	9815R

Fiber Type	Code
250um bare fiber	25
900um loose tube	90
Others	XX

Connector Type	Code
No Connector	NC
FC/UPC	FU
SC/UPC	SU
FC/APC	FA
SC/APC	SA
Others	XX

Opto-Link Corporation Ltd. reserves the right to make changes to the products described herein without notice.

COPYRIGHT © 2002-2006 Opto-Link Corporation Ltd.

Tel: +852 2480-6106 Fax: +852 2480-1621 Email: contact@optolinkcorp.com Website: www.optolinkcorp.com